

# FIRESAFE /



**EPD**<sup>®</sup>  
THE INTERNATIONAL EPD<sup>®</sup> SYSTEM

## Environmental Product Declaration

*In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:*

### **FIRESAFE FT board fire-rated**



Publication Date

2023.11.06

Valid until

2028.11.05

Owner of Declaration

Firesafe AS

LCA practitioner

Hedgehog Company B.V.

Programme

The International EPD<sup>®</sup> System,  
[www.environdec.com](http://www.environdec.com)

Program Operator

EPD International AB

EPD number

S-P-10328



An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)



# General information

## Programme information

Programme	The International EPD® System
Address	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website	<a href="http://www.environdec.com">www.environdec.com</a>
E-mail	<a href="mailto:info@environdec.com">info@environdec.com</a>

<b>Accountabilities for PCR, LCA and independent, third-party verification</b>
<b>Product Category Rules (PCR)</b>
ISO standard ISO 21930 and CEN standard EN 15804 serve as the core Product Category Rules (PCR)
Product Category Rules (PCR): PCR 2019:14 Construction products, version 1.3.1
PCR review was conducted by: The Technical Committee of the International EPD® System. See <a href="http://www.environdec.com/TC">www.environdec.com/TC</a> for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a> .
<b>Life Cycle Assessment (LCA)</b>
LCA accountability: Gloria Carta, Hedgehog Company <a href="mailto:gloria@hhc.earth">gloria@hhc.earth</a> Turbinestraat 6, 1014 AV Amsterdam, The Netherlands
<b>Third-party verification</b>
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:  <input checked="" type="checkbox"/> EPD verification by individual verifier  Third-party verifier: Matthew Fishwick, Fishwick Environmental Ltd.  Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:  <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No  [Procedure for follow-up the validity of the EPD is at minimum required once a year with the aim of confirming whether the information in the EPD remains valid or if the EPD needs to be updated during its validity period. The follow-up can be organised entirely by the EPD owner or together with the original verifier via an agreement between the two parties. In both approaches, the EPD owner is responsible for the procedure being carried out. If a change that requires an update is identified, the EPD shall be re-verified by a verifier]



The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

EPDs of construction products may not be comparable if they do not comply with EN 15804+A2.



## Product description

This EPD concerns FIRESAFE FT board fire-rated. This board can be used for closing oversized penetrations and cable entries, in a smoke-tight and fire resistant manner, widely tested resulting in an extensive field of application. The basic technical specifications of the product are given in table 1. The product is produced by Firesafe in Gorinchem, The Netherlands, and sold in the size of 50x600x1200mm. This EPD studies one m<sup>2</sup> of board, based on a board with dimensions as given in table 1, with a thickness of 50 mm.

**Table 1.** Technical specifications of the FIRESAFE FT board fire-rated.

Characteristic	Value
Fire resistance (EN 1366-2; 1366-3; EN 13501-1; EN 13501-2)	EI 30 up to EI 180, depending on application and configuration
Smoke resistance (EN 1634-3)	Sa - Sm
Acoustic performance (EN 10140-2; ISO 717-1)	24 dB up to 45 dB, depending on application and configuration
Use category	Z <sub>2</sub> , indoor use
Application conditions	between +5 °C and +30 °C, max. 70% RH
Shelf life	Store dry, between +5 °C and +30 °C, max. 70% RH, avoid condensation and UV
Density	Approximately 160 kg/m <sup>3</sup>
Components	Formaldehyde and asbestos Free, SVHC free
Size	1200 mm x 600 mm
Thickness	50 mm ± 3mm

## Company

Firesafe was established in 1981 under the name «Protan Brannsikring». During the decades, the company has grown significantly and today Firesafe is the biggest supplier of passive fire protection to the construction industry in the Nordic countries.

Although passive fire protection accounts for the majority of the business, Firesafe does also supply a wide range of other fire protection products – including extinguishing systems, fire alarms and products for the offshore/marine sector. Today the company has more than 1000 employees. Headquarters is located at Lørenskog, outside Oslo, Norway.

Fire sealing systems has since the start in 1981, and still today, always been an important business area for Firesafe. Today Firesafe can offer a state-of-the-art product range to cover almost all situations/challenges that can occur in the construction project. To meet new regulations, more severe test procedures and new building materials we frequently run new fire tests to have updated documentation to satisfy the market.

Supplier

Firesafe AS



Address, corporate office	Robsrudskogen 15, 1470 Lørenskog, Norway
E-mail	support@firesafe.no
Phone	+47 22 72 20 20
Website	www.firesafe.no
Production Location	Gorinchem, The Netherlands

## EPD scope and background

Reference Service Life	N.A.
Declared Unit	1 m <sup>2</sup> of FIRESAFE FT board fire-rated.

The data of a board with dimensions 1200 mm x 600 mm x 50 mm was collected and extrapolated to 1 m<sup>2</sup> of board.

The Ecoinvent v3.8 database is used as a source of secondary data. The study meets the requirements of NEN-EN ISO 14025:2010 [1] and the EN 15804+A2:2019 [2]. This EPD follows the PCR 2019:14 v1.3.1 [3] and General Programme Instructions v4.0 [4] from Environdec. The Ecochain software Mobius version 1.0.224 is used to model the product system. The foreground data is based on the year 2022.

The EPD system boundaries are cradle-to-gate with options, modules A4-A5, B1, C1-C4 and D. The use and end-of-life stages are calculated for the geographical area Europe, since this is the typical market for the product. Operational water and energy use during the use stage are not relevant for this product and are omitted. Energy indicators PERE, PERM, PERT, PENRE, PENRM and PENRT are calculated using option A as given by Annex 3 of PCR 2019:14.

### Allocation of co-products

Allocation is avoided when possible. When allocation is necessary, it is based on physical properties when the revenue is low and on economic values in all other cases. Materials flows with specific inherent properties (e.g. biogenic carbon) are allocated according to their physical flows. Avoided impacts from allocated co-products are not declared in module D.

### Allocation of end-of-life scenarios


The end-of-life system boundary of the product system is set where outputs of the system have reached the end-of-waste state. Examples of these outputs are materials, products or construction elements. This approach ensures that all waste processing during any module of the products system is included up to the system boundary of the respective module. Potential loads and benefits of secondary material, secondary fuel, or recovered energy leaving the product system are declared in module D. When a secondary material or fuel crosses the system boundary, for example at the end-of-waste state substituting another material or fuel in the following product system, the benefits and/or loads will be calculated based on a specified scenario based on current average practice.



**Table 1.** Modules considered in this EPD.

Life cycle stage	Module		Geography	Spec. data	Variation - products	Variation - locations
Production stage	A1	x	Raw material supply	RoW		
	A2	x	Transport	RER	37,7%*	0%
	A3	x	Production	NL		
Construction stage	A4	x	Transport to site	GLO	-	-
	A5	x	Construction - installation process	-		
Use stage	B1	x	Use	-	-	-
	B2	ND	Maintenance	-	-	-
	B3	ND	Repair	-	-	-
	B4	ND	Replacement	-	-	-
	B5	ND	Refurbishment	-	-	-
	B6	ND	Operational energy use	-	-	-
	B7	ND	Operational water use	-	-	-
End-of-life stage	C1	x	Deconstruction demolition	-	-	-
	C2	x	Transport	GLO	-	-
	C3	x	Waste processing	Europe without CH	-	-
	C4	x	Disposal	Europe without CH	-	-
Benefits and loads beyond the system boundaries	D	x	Reuse - Recovery - Recycling potential	RER	-	-

\*The specific data included in this calculation is the transport data and the electricity consumption data in A1-A3, as well as the specific data from the specific EPDs used in A1. The stone wool EPD did not include a percentage of specific data, it was estimated that 50% of the data in the EPD is specific data.

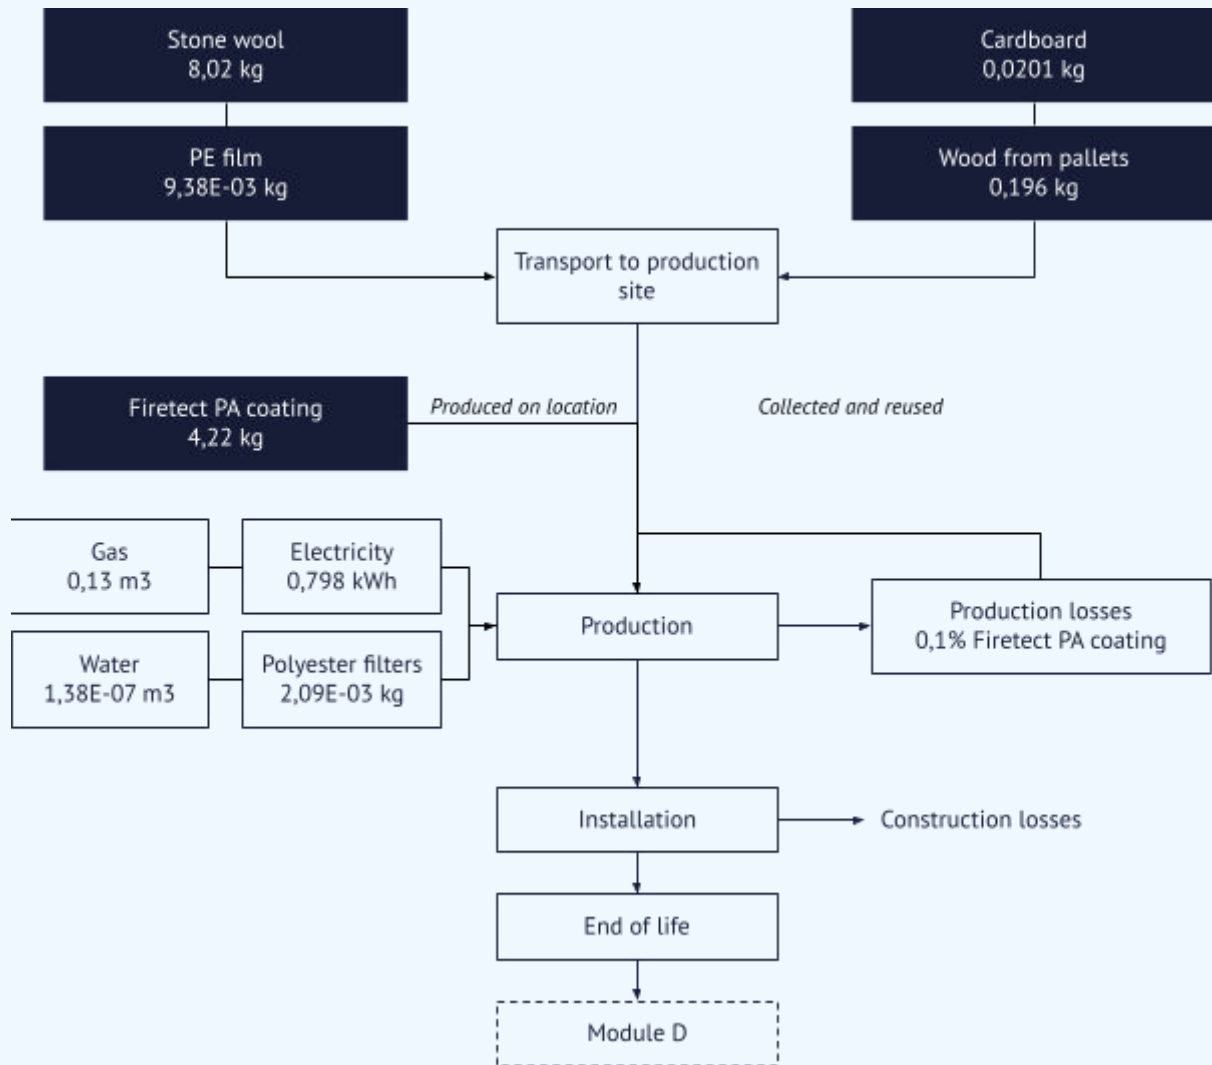

**Figure 2.** Flowchart of the product system under study, one square metre of board.



## Data quality assessment

It is assumed that the data quality of the information from the processes at the producer is higher than that of the other processes. Therefore, producer specific data is used when possible. These data are recent (2022), complete and based on one year averaged data. The technological coverage and geographical coverage reflect the physical reality of the product. Furthermore, the economic flows approach reality as closely as possible within practically feasible limits for the LCA practitioner.

The time representativeness of the used references for generic data is accurate, since the difference between the reference year (2022) and the time period for which the data is representative (2019) is <3 years.

The geographical coverage of this study is representative of the geographical scope of the production process. Where possible, specific country specific references are selected. Where this is not possible, region-specific references are selected. The quality level ranges from good to very good.

The technological coverage of this study is representative as specific business, product, and process data of the year 2022 are used to model the product system under study. Therefore, the data quality is very good.

The scenarios in this study are currently in use and are representative for one of the most probable alternatives.

## Cut-off criteria and assumptions

All inputs and outputs for which data is available are included in the LCA. Data gaps are filled with conservative assumptions and generic data. The cut-off criteria for data gaps is 1% of renewable and nonrenewable energy usage and 1% of the total mass input of that unit process. The total of excluded input flows per module will not exceed 5% of energy usage and mass input. This LCA uses expert judgement and conservative considerations to determine which inputs comply with these criteria.

Some data gaps were encountered. This section describes how these data gaps were handled.

### Natural gas

The natural gas was given as m<sup>3</sup>, which is used to model the raw natural gas. However, the gas needs to undergo combustion to be used as heat, which is expressed in MJ, therefore a conversion was made using the conversion factor of 31,65 MJ per m<sup>3</sup> of gas. This value is the lower end of the possible range. [5]

### Direct emissions

Some of the substances reported in the emissions report were not available as references. Therefore, some adjustments were made:

- Formaldehyde and propionaldehyde are added together and referenced as general aldehydes
- Dibutylphthalate (DBP) was added to the reference for benzene, another CMR (carcinogenic, mutagenic, toxic for reproduction) compound.
- Saturated aliphatic hydrocarbons C9-C16, TVOC, TVOOC, carcinogens and unidentified VOC (volatile organic compounds) were added to toluene as the toluene equivalent was given in the report for these compounds.

## Content declaration

The table below shows the material content of 1 m<sup>2</sup> FIRESAFE FT board fire-rated.

The packaging per kg is also included in the table. The packaging is consumer packaging, as it contains a sales unit for the final user.

**Table 2.** Content declaration of 1 m<sup>2</sup> of FIRESAFE FT board fire-rated.





Material	Weight (kg/m <sup>2</sup> end product)	Post-consumer recycled material, weight-%	Biogenic material, weight-% and kg C/m <sup>2</sup>
Mineral	8,02	-	-
Firetect PA coating fire-rated (wet weight)	4,22	-	-
<b>Total weight (wet) excl. packaging</b>	<b>12,2</b>		
<b>Total weight (dry) excl. packaging</b>	<b>10,9</b>		

Material	Weight (kg/m <sup>2</sup> end product)	Weight-% (versus product)	Biogenic material, weight - % and kg C/m <sup>2</sup>
Cardboard	0,0201	0,16%	41,78% / 8,41E-03
PE packaging film	9,38E-03	0,08%	0 / 0
Wood from pallet	0,196	0,06%	46,58% / 3,66E-03
<b>Total weight (wet) incl. packaging</b>	<b>12,3</b>		<b>0,0121 kg C/m<sup>2</sup></b>
<b>Total weight (dry) incl. packaging</b>	<b>11</b>		<b>0,0121 kg C/m<sup>2</sup></b>

## Declaration of material content of SVHC

The product does not contain any substances from the Candidate List of Substances of Very High Concern (SVHC) for authorisation in amounts greater than 0,1% (1000 ppm).



# Calculation rules

## Production stage (A1-A3)

The materials for 1 m<sup>2</sup> FIRESAFE FT board fire-rated are listed in table 2. Lorries of type EURO 6 transport the materials to the production facility. The ingredients mineral board are sprayed with the PA coating which is filtered, and subsequently dried at Firesafe's production site in Gorinchem, the Netherlands. The process consumes grey electricity from natural gas as well as natural gas for heat. Water is used to clean the filters, which are replaced once a year. The electricity was allocated based on the duration of use and power of the dissolver. This was checked against the total energy use of 2022. Per m<sup>2</sup> of board produced, there is 0,1% of coating waste in the production process which is collected and reused.

## Construction stage (A4-A5)

The transportation distance is calculated to the storage location in Oslo, Norway. In addition, 300 km of transport by truck are added to account for the transportation of the product from Oslo to the final consumer. The transportation by truck (1277 km) is modelled with a global average reference. This reference includes various lorry types and emission classes. The table below shows the included lorries as well as the characteristics of a container ship (288 km). The installation of the board is done manually, therefore there is no energy during installation. The installation does not require any ancillary materials, water or other resources. Packaging is discarded at this stage. There are no known direct emissions during the installation of the board. A standard construction waste of 2% was taken into account in module A5.

**Table 3.** Transportation information per transportation type. The values for lorries are based on averages of vehicles of emission type EURO3-EURO6. The values of the ship are based on a global weighted average for container ships.

Type	Capacity utilisation (%)	Volume capacity utilisation factor	Bulk density product (kg/m <sup>3</sup> )	Fuel consumption per tkm	Fuel consumption per km
Lorry 3,5-7,5t	Default*	1	160	0,109-0,111 kg	5,94E-05 kg
Lorry 7,5-16t	Default*	1	160	0,0472-0,0481 kg	2,57E-05 kg
Lorry 16-32t	Default*	1	160	0,0366-0,0378 kg	1,86E-05 kg
Lorry >32t	Default*	1	160	0,0192-0,0196 kg	1,05E-05 kg
Ship	70%	1	160	0,00252 kg	1,35E-06 kg

\* the default value from the ecoinvent reference 'market group for transport, freight, lorry, unspecified | transport, freight, lorry, unspecified | Cutoff, U [GLO]' was used. More information can be found in the ecoinvent v3.8 database.

**Table 4.** Construction waste and processing per material.

Construction waste	Collection	Distance to processing	Total waste	Landfill	Incineration	Recycling
Cardboard*	Separate	50 km	0,0201 kg	2,01E-04 kg	0,0199 kg	-
Wood*	Separate	50 km	7,85E-03 kg	7,85E-05 kg	7,77E-03 kg	-
PE*	Separate	50 km	9,38E-03 kg	9,38E-05 kg	9,28E-03 kg	-
FT board construction waste 2%	Separate	50 km	0,160 kg	0,160 kg	-	-



PA coating construction waste 2%	Together with FT board	50 km	5,87E-02 kg	5,87E-02 kg	-	-
----------------------------------	------------------------	-------	-------------	-------------	---	---

\* The waste processing of these materials is modelled with a market group reference. The table is based on the most prevalent market, which is DE for cardboard, wood and PE film.

## Use stage (B1)

The emissions of the FIRESAFE FT board are measured in lab conditions after a period of 28 days. The results can be provided upon request by Firesafe. This LCA model includes the emissions of VOCs, carcinogenic, mutagenic and reprotoxic (CMR) compounds and aldehydes.

## End-of-life stage (C1-C4)

For transport of waste to a waste handling facility, the standard transport distance of 50 km is used. The mineral board material can be recycled according to the manufacturer. However, this is only possible at a specific location and specifically targets unused surplus. Furthermore, the product also includes a layer of PA coating, which standard end-of-life scenario is landfill. Finally, polluted mineral materials, such as mineral boards, in Norway are 100% landfilled [6]. It is assumed the addition of the PA coating results in the board being considered polluted. For these reasons, 100% landfill is chosen as an end-of-life scenario for the FT board. It is assumed that the board is collected separately. Although the FT board and PA coating are integrated, they are presented separately on table 5 as they are modelled with 2 different database references. The dry weight for the PA coating is used.

**Table 5.** End-of-Life processing of the materials of 1 m<sup>2</sup> FIRESAFE FT board fire-rated.

Waste Material	Collection	Transport distance	Landfill (kg)	Incineration (kg)	Recycling (kg)	Reuse (kg)
PA coating	Together with the board	50 km	100% 2,94 kg	0%	0%	0%
FT board	Separate	50 km	100% 8,02 kg	0%	0%	0%

## Loads and benefits outside the system boundaries (D)

No loads or benefits are calculated in module D, as there is no primary material recycled, energy from incineration, or secondary material lost.



## Environmental impact per declared unit (1 kg)

Table 6 shows the complete environmental profile of one square metre FT board. The impact assessment results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

The GWP-GHG indicator is required by the PCR v1.3.1 of EPD International. The indicator accounts for all greenhouse gases, with the exception of biogenic carbon dioxide uptake, emissions or storage. It was calculated with the GWP-biogenic and GWP-fossil categories from EF 3.0. In this method, the characterisation factor for biogenic CO<sub>2</sub> is zero. The characterisation factor for fossil CH<sub>4</sub> is 36,8 and for biogenic CH<sub>4</sub> is 34. This impact category is not included in Climate change - total.

**Table 6.** Environmental impact of 1 m<sup>2</sup> FIRESAFE FT board fire-rated, in the core impact categories.

Impact category	A1-A3	A4	A5	B1	C1	C2	C3	C4	D
GWP-total	1,05E+01	1,93E+00	3,24E-01	0,00E+00	0,00E+00	7,41E-02	0,00E+00	2,05E-01	0,00E+00
GWP-f	1,09E+01	1,91E+00	2,83E-01	0,00E+00	0,00E+00	7,34E-02	0,00E+00	2,05E-01	0,00E+00
GWP-b	-4,59E-01	5,25E-03	4,07E-02	0,00E+00	0,00E+00	2,05E-04	4,12E-01	3,02E-04	0,00E+00
GWP-luluc	5,15E-03	1,33E-02	4,00E-04	0,00E+00	0,00E+00	5,19E-04	0,00E+00	7,17E-05	0,00E+00
ODP	4,58E-07	4,04E-07	1,88E-08	0,00E+00	0,00E+00	1,55E-08	0,00E+00	2,65E-08	0,00E+00
AP	8,64E-02	1,13E-02	2,00E-03	0,00E+00	0,00E+00	4,05E-04	0,00E+00	6,60E-04	0,00E+00
EP-fw	1,64E-04	2,19E-05	3,80E-06	0,00E+00	0,00E+00	8,51E-07	0,00E+00	9,46E-07	0,00E+00
EP-m	1,14E-02	3,91E-03	3,35E-04	0,00E+00	0,00E+00	1,43E-04	0,00E+00	2,27E-04	0,00E+00
EP-t	2,62E-01	4,25E-02	6,27E-03	0,00E+00	0,00E+00	1,56E-03	0,00E+00	2,49E-03	0,00E+00
POCP	3,19E-02	1,22E-02	9,41E-04	5,64E-09	0,00E+00	4,50E-04	0,00E+00	7,55E-04	0,00E+00
ADP-mm <sup>2</sup>	2,66E-05	6,45E-06	6,83E-07	0,00E+00	0,00E+00	2,50E-07	0,00E+00	1,99E-07	0,00E+00
ADP-f <sup>2</sup>	1,58E+02	2,87E+01	3,85E+00	0,00E+00	0,00E+00	1,10E+00	0,00E+00	1,91E+00	0,00E+00
WDP <sup>2</sup>	2,74E+00	1,12E-01	5,95E-02	0,00E+00	0,00E+00	4,34E-03	0,00E+00	8,48E-02	0,00E+00
PM	7,79E-07	2,06E-07	2,08E-08	0,00E+00	0,00E+00	7,98E-09	0,00E+00	1,32E-08	0,00E+00
IR <sup>1</sup>	1,68E-01	1,20E-01	6,22E-03	0,00E+00	0,00E+00	4,62E-03	0,00E+00	7,70E-03	0,00E+00
ETP-fw <sup>2</sup>	1,38E+02	2,54E+01	3,48E+00	2,94E-06	0,00E+00	9,82E-01	0,00E+00	3,29E+00	0,00E+00
HTP-c <sup>2</sup>	1,66E-08	9,23E-10	3,63E-10	2,38E-16	0,00E+00	3,53E-11	0,00E+00	4,17E-11	0,00E+00
HTP-nc <sup>2</sup>	2,27E-07	2,67E-08	5,31E-09	7,69E-15	0,00E+00	1,04E-09	0,00E+00	1,16E-09	0,00E+00
SQP <sup>2</sup>	1,11E+02	2,55E+01	2,88E+00	0,00E+00	0,00E+00	9,95E-01	0,00E+00	4,22E+00	0,00E+00



**GWP-total** = Climate change [kg CO2 eq]; **GWP-f** = Climate change - Fossil [kg CO2 eq]; **GWP-b** = Climate change - Biogenic [kg CO2 eq]; **GWP-luluc** = Climate change - Land use and LU change [kg CO2 eq]; **ODP** = Ozone depletion [kg CFC11 eq]; **AP** = Acidification [mol H+ eq]; **EP-fw** = Eutrophication, freshwater [kg P eq]; **EP-m** = Eutrophication, marine [kg N eq]; **EP-T** = Eutrophication, terrestrial [mol N eq]; **POCP** = Photochemical ozone formation [kg NMVOC eq]; **ADP-mm** = Resource use, minerals and metals [kg Sb eq]; **ADP-f** = Resource use, fossils [MJ]; **WDP** = Water use [m3 depriv.]; **PM** = Particulate matter [disease inc.]; **IR** = Ionising radiation [kBq U-235 eq]; **ETP-fw** = Ecotoxicity, freshwater [CTUe]; **HTP-c** = Human toxicity - cancer; **HTP-nc** = Human toxicity - non-cancer; **SQP** = Land use [Pt] **1.**

This impact category deals mainly with the eventual impact of low dose ionising radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionising radiation from the soil, from radon and from some construction materials is also not measured by this indicator. **2.** The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

**Table 7.** The impact of 1 m2 FIRESAFE FT board fire-rated in the resource use indicators.

Resource use	A1-A3	A4	A5	B1	C1	C2	C3	C4	D
PERE	7,95E+01	4,90E-01	2,03E+00	0,00E+00	0,00E+00	1,90E-02	0,00E+00	2,33E-02	0,00E+00
PERM	4,19E-01	0,00E+00	-4,19E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	7,99E+01	4,90E-01	1,61E+00	0,00E+00	0,00E+00	1,90E-02	0,00E+00	2,33E-02	0,00E+00
PENRE	1,65E+02	3,05E+01	4,44E+00	0,00E+00	0,00E+00	1,18E+00	0,00E+00	2,03E+00	0,00E+00
PENRM	3,96E-01	0,00E+00	-3,96E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	1,65E+02	3,05E+01	4,04E+00	0,00E+00	0,00E+00	1,18E+00	0,00E+00	2,03E+00	0,00E+00
SM	9,97E-02	0,00E+00	1,99E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	6,92E-02	3,79E-03	1,53E-03	0,00E+00	0,00E+00	1,47E-04	0,00E+00	2,04E-03	0,00E+00

**PERE** = Use of renewable primary energy excluding renewable primary energy resources used as raw materials [MJ]; **PERM** = Use of renewable primary energy resources used as raw materials [MJ]; **PERT** = Total use of renewable primary energy resources [MJ]; **PENRE** = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials [MJ]; **PENRM** = Use of non-renewable primary energy resources used as raw materials [MJ]; **PENRT** = Total use of non-renewable primary energy resources [MJ]; **SM** = Use of secondary material [kg]; **RSF** = Use of renewable secondary fuels [MJ]; **NRSF** = Use of non-renewable secondary fuels [MJ]; **FW** = Use of net fresh water [m3]

**Table 8.** The impact of 1 m2 FIRESAFE FT board fire-rated in the waste indicators.

Waste categories	A1-A3	A4	A5	B1	C1	C2	C3	C4	D
HWD	6,48E-05	7,43E-05	3,04E-06	0,00E+00	0,00E+00	2,88E-06	0,00E+00	2,91E-06	0,00E+00
NHWD	2,80E+00	1,96E+00	3,30E-01	0,00E+00	0,00E+00	7,65E-02	0,00E+00	1,10E+01	0,00E+00
RWD	3,79E-04	1,89E-04	1,21E-05	0,00E+00	0,00E+00	7,27E-06	0,00E+00	1,21E-05	0,00E+00



**HWD** = Hazardous waste disposed [kg]; **NHWD** = Non-hazardous waste disposed [kg]; **RWD** = Radioactive waste disposed [kg]

**Table 9.** The impact of 1 m2 FIRESAFE FT board fire-rated in the output flow indicators.

Output flows	A1-A3	A4	A5	B1	C1	C2	C3	C4	D
CRU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	0,00E+00	0,00E+00	1,05E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	0,00E+00	0,00E+00	2,06E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

**CRU** = Components for re-use [kg]; **MFR** = Materials for recycling [kg]; **MER** = Materials for energy recovery [kg]; **EEE** = Exported energy, electric [MJ]; **EET** = Exported energy, thermal [MJ]

**Table 10.** The environmental impact of 1 m2 FIRESAFE FT board fire-rated on the additional indicator.

Additional indicators	A1-A3	A4	A5	B1	C1	C2	C3	C4	D
GWP-GHG	1,09E+01	1,91E+00	3,04E-01	0,00E+00	0,00E+00	7,34E-02	0,00E+00	2,05E-01	0,00E+00

**GWP-GHG** = Climate change - greenhouse gases [kg CO2 eq]



## References

- [1] 'ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures', International Organization for Standardization, ISO14025:2010.
- [2] 'NEN-EN 15804+A2: Duurzaamheid van bouwwerken - Milieuverklaringen van producten - Basisregels voor de productgroep bouwproducten', NEN-EN 15804:2012+A2:2019.
- [3] PCR 2019:14 Construction products (EN 15804:A2) (1.3.1), IVL Swedish Environmental Research Institute, EPD International Secretariat, July 2023.
- [4] EPD International (2021) General Programme Instructions for the International EPD® System. Version 4.0. [www.environdec.com](http://www.environdec.com)
- [5] Calorische waarde. [https://www.joostdevree.nl/shtmls/calorische\\_waarde.shtml](https://www.joostdevree.nl/shtmls/calorische_waarde.shtml) Accessed on 13 October 2023.
- [6] Waste from building and construction. (2022, December 13) <https://www.ssb.no/en/natur-og-miljo/avfall/statistikk/avfall-fra-byggeaktivitet> . Accessed on 13 October 2023.